


Plug & Play Emergency Kit

For Use with V4 Vapours & V4 Lineouts

PXVAPEMKITPP

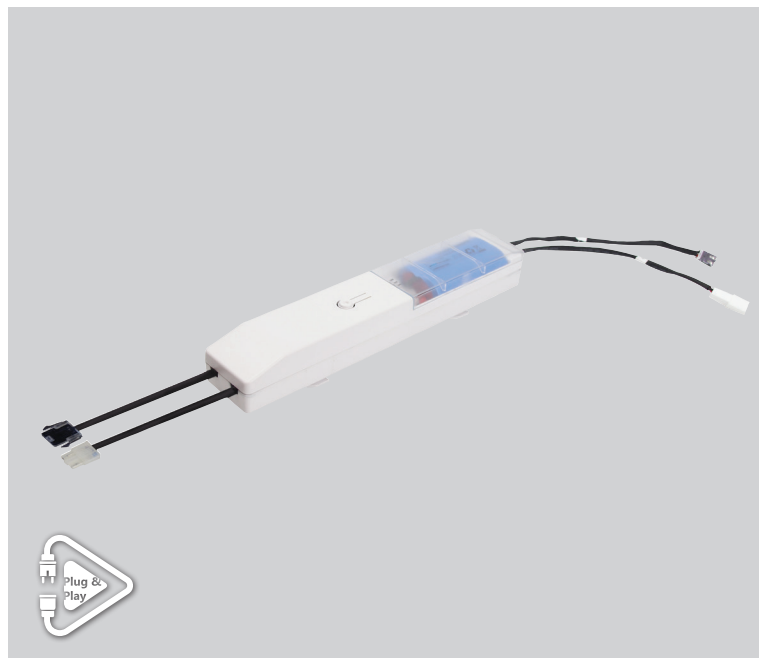

Rated Input Voltage Range	220-240Vac
Power Factor	>0.5
Input Frequency	50/60HZ
Input AC Current (Max.)	<0.15A
Efficiency	>75%
Emergency Power	3W Max
Emergency Power Range	0.5-3W (230Vac 50-200V)
Standby Power	<0.5W
Maximum Output Current of the Emergency Drive	<2A
Battery	LiFePO4 - 6.4V 1800mAH
Charge Current	200mA
Charge Voltage	7.2V
Emergency Output Current	60mA
Emergency Output Voltage	50-200V
Emergency Time	≥3 hours
Working Temperature	-10~+40°C
Working Humidity	20~90%RH non-condensing
Lightning Surge	L-N Class I +/- 0.5KV (IEC61000-4-5 2014)
Dimensions (mm)	130 x 35mm
Warranty	5 Years

Features & Applications

This Plug & Play Emergency Kit is designed for use with 4th generation Prelux IP65 Vapour (V4) batten and 4th generation Lineout (V4) IP20 batten.

The LiFePO4 battery pack provides ≥3 hours of light at 3W in emergency mode.

This kit is compatible with the following products:

- Vapour with product codes ending in V4
- Lineout with product codes ending in V4