


## Eurospot CCT White 15W Datasheet

3000K/4000K/5000K 1200-1350Lm LED Track Spotlight

PXEURO15WHCCT

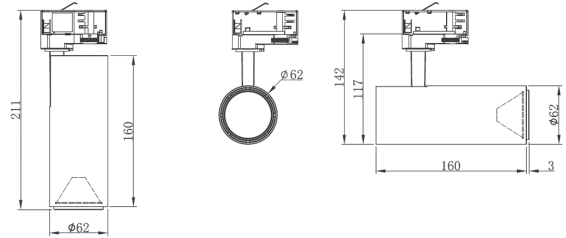

|    |          |     |      |     |      |
|----|----------|-----|------|-----|------|
| CE | UK<br>CA | 15W | IP20 | LED | 240V |
|----|----------|-----|------|-----|------|

|                                 |                              |
|---------------------------------|------------------------------|
| <b>Dimensions</b>               | ø62*160*142mm                |
| <b>Cut-Out</b>                  | -                            |
| <b>Weight</b>                   | 0.54kg                       |
| <b>Material</b>                 | Aluminium                    |
| <b>Colour/Finish</b>            | White                        |
| <b>IK Rating</b>                | IK05                         |
| <b>Voltage/Frequency</b>        | 200-240V 50/60Hz             |
| <b>Luminous Flux</b>            | 1200-1350Lm                  |
| <b>Luminous Efficacy</b>        | 80-90Lm/w                    |
| <b>Color Rendering Index</b>    | >90                          |
| <b>CCT Colour Temp</b>          | 3000K/4000K/5000K Selectable |
| <b>SDCM Colour Consistency</b>  | <3                           |
| <b>UGR Unified Glare Rating</b> | >19                          |
| <b>LEDs</b>                     | COB                          |
| <b>Light Control</b>            | Triac Dimmable               |
| <b>Beam Angle</b>               | 38°                          |
| <b>Adjustable</b>               | 350° (H)                     |
| <b>Chip</b>                     | TYF                          |
| <b>IP Rating</b>                | IP20                         |
| <b>L80B10</b>                   | 50,000 hours                 |
| <b>Warranty</b>                 | 5 years                      |

## Features & Applications

The Eurospot CCT range of LED track spots provide an excellent colour rendering index of >90 to increase the colour fidelity of the target illuminated object or space.

The 3000K/4000K/5000K selectable colour temperatures make this fitting highly adaptable to a wide variety of applications.

- 3 Circuit Fitting
- Colour Temperature Selectable
- Triac Dimmable
- Adjustable 350°