


Milano 8W IP65 Non-Dim Datasheet

3000K 720Lm LED Downlight

PXMIL8W

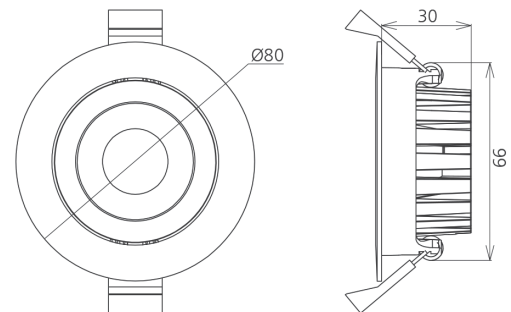

CE	UK CA	8W	IP65	LED	240V
----	----------	----	------	-----	------

Dimensions (mm)	Ø80*30mm Cutout Ø68-72mm
Weight (kg)	0.3
Material	Aluminium & PC
Colour/Finish	White RAL9016
IK Rating	IK08
Voltage/Frequency	220-240V 50/60Hz
Luminous Flux	720lm
Luminous Efficacy	90lm/w
Color Rendering Index	80
CCT Colour Temp	3000K
SDCM Colour Consistency	<3
UGR Unified Glare Rating	-
LEDs	COB
Light Control	On/Off
Beam Angle	60°
Adjustable	Tilts 30°
Chip	CREE
IP Rating	65
Maintained Luminous Flux	40,000h
Warranty	5 years

Features & Applications

The Prelux Milano 8W LED recessed downlight has a super slim and compact design, perfectly suited for narrow ceiling installations. The diamond patterned surface lens ensures high light transmittance and uniform output. The T-shaped heat sink greatly improves cooling efficiency and the fitting can also be tilted 30 degrees to direct the light to specific areas.

- Long lifetime of 40,000 hours
- IP65 protection rating
- 60° wide beam angle
- Tilts 30°
- Ø68-72mm cutout
- CCT: 3000K
- 5 years warranty

Options Available	
Light Controls	Casambi *CM / Dali *D
3 Hr Emergency	PXEMPACK