
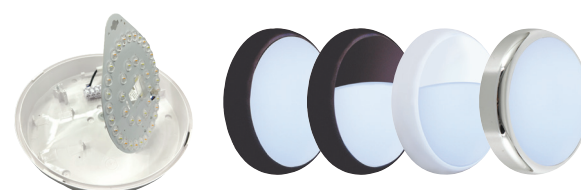
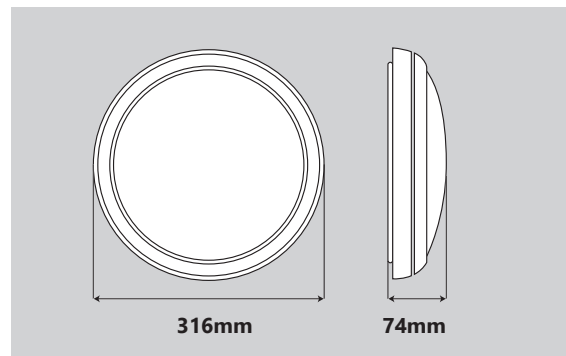



Oslo Plus 5CCT Emergency Datasheet

10/14/20W 1200/1680/2400Lm LED Bulkhead/Ceiling Light

PXOSMEMP

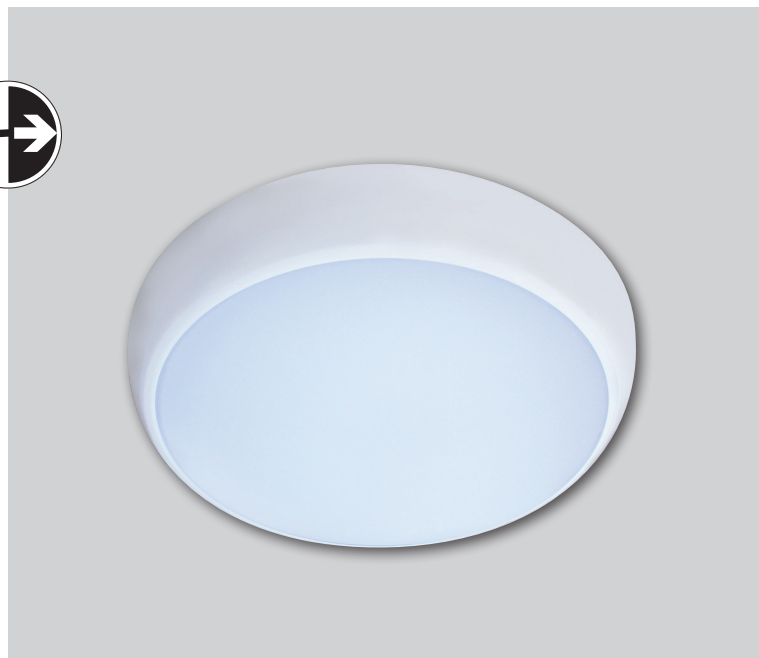

PXOSBZBLK Black Round
PXOSBZEYB Black Eyelid
PXOSBZEYW White Eyelid
PXOSBZCH Chrome Effect



CE	UK CA	Multi Watt	IP65	LED	240V
----	----------	---------------	------	-----	------

Dimensions (mm)	ø316 x 74mm
Weight (Kg)	0.76Kg
Material	PC
Wattage	10W/14W/20W Selectable
Colour/Finish	White (Additional bezels available)
IK Rating	IK08
Voltage/Frequency	220-240V 50/60Hz
Luminous Flux	2400Lm
Luminous Efficacy	120lm/W
Color Rendering Index	≥80
CCT Colour Temp	2700K/3000K/4000K/5000K/6000K
SDCM Colour Consistency	≤6
UGR Unified Glare Rating	≤19
LEDs	SMD 40Pcs
Light Control	Non
Beam Angle	120°
Adjustable	No
Chip	Everlight
IP Rating	IP65
Maintained Luminous Flux	50,000h (L80B10), 65,000h (L70B50)
Emergency Mode	3W 180Lm, LiFePO4 battery
Warranty	5 years fitting, 5 years battery

Features & Applications

With 3 wattages and 5 colour temperatures, the Oslo Plus is the most versatile model to date.

The hinged LED tray and conduit entry points on the base and diffuser also make installation even easier.

The IP65 protection rating makes it suitable for an extensive range of applications, including outdoors.

Options Available	
P&P Microwave Corridor Kit	PXOSMWCKIT
Black Round Bezel	PXOSBZBLK
Black Eyelid Bezel	PXOSBZEYB
White Eyelid Bezel	PXOSBZEYW
Chrome Bezel	PXOSBZCH