

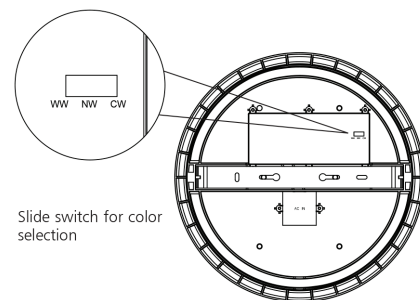


Othello CCT Dimmable Datasheet

12W 1150-1300Lm LED Bulkhead / Ceiling Light

PXOTH12CCTD

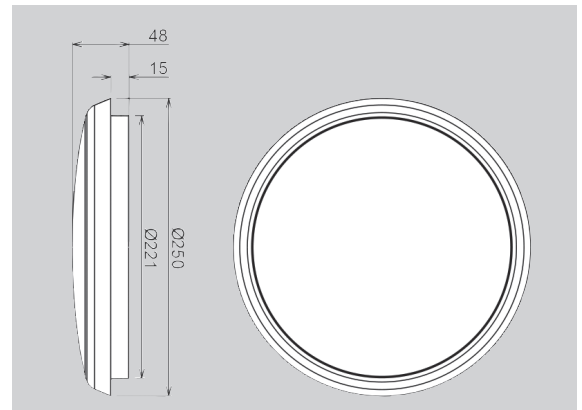

Dimensions	Ø250*48mm
Input Voltage	200~240V 50Hz
Input Power	12W
Power Factor	≥0.9
Beam Angle	120°
Efficiency	≥88%
Housing Color	White
Luminous Flux	1150Lm (WW), 1300Lm (CW), 1250Lm (DL)
Color Rendering Index	>80
Lifetime	40,000Hrs
CCT	3000K / 4000K / 5700K
Protection Level	IP54 / IK10
Storage Temperature	-20°C~+65°C
Working Temperature	-20°C~+45°C
Dimmable	Triac Dimming
Dimming Range	8-100%
Certification	CE, RoHS, SAA
Warranty	3 Years

Features & Applications

The Othello CCT comes with the ability to choose either warm, cool or daylight colour temperatures by sliding a switch on installation of the product.

The IP54 protection rating also makes it suitable for a wider range of applications, including stairwells, corridors and toilet facilities.

The slim design and superior quality finish also makes the Othello CCT range a superb choice when aesthetics are a consideration.