


Roma 24W Datasheet

4000K 2160Lm LED Downlight

PXR24W4K

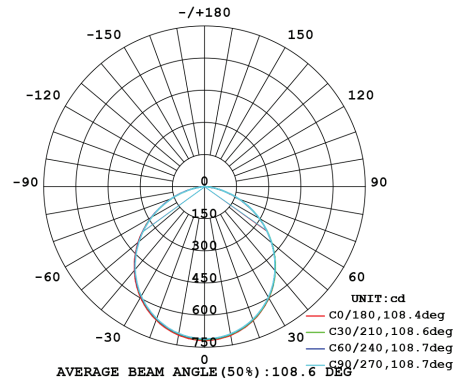

24W

IP20

LED

240V

Dimensions	ø230*50mm, Cutout ø190-210mm
Weight	0.40kg
Material	Aluminium & PC
Colour/Finish	White
IK Rating	IK06
Voltage/Frequency	AC220-240V, 50/60Hz
Luminous Flux	2160Lm
Luminous Efficacy	90Lm/W
Color Rendering Index	≥80
CCT Colour Temp	4000K
SDCM Colour Consistency	≤6
UGR Unified Glare Rating	-
LEDs	SMD 2835
Light Control	On/Off
Beam Angle	105°
Adjustable	No
Chip	Boke
Maintained Luminous Flux	50,000h (L80B10), 65,000h (L70B50)
Warranty	5 Years

Features & Applications

The Prelux Roma 24W SMD LED is an ideal solution for most indoor application areas.

- Cable clamp, strain relief bushing & FRP isolating sleeve to avoid damage
- Excellent performance heat sink design
- Optimized LED arrangement to get perfect light distribution curve
- Low glare rate, good light quality output
- Also available in 5W, 12W and 18W versions