


Roma II Professional 25W Datasheet

CCT 2180-2630lm LED Downlight (210mm Cutout)

PXR25WCCTP210

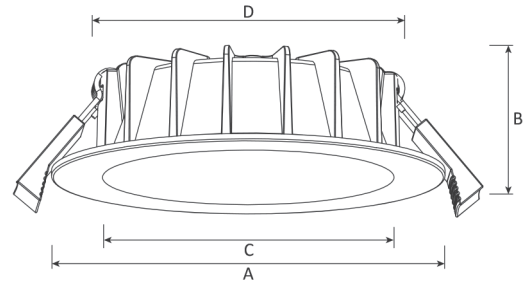

Dimensions (mm)	A	B	C	D	Cutout (mm)
	225	34	173	185	Ø200-210

CE	UK CA	25W	IP54	LED	230V
----	----------	-----	------	-----	------



Input Rated Voltage	AC230V
Frequency	50/60Hz
Input Voltage	AC220-240V
Efficiency	≥85%
Total Load Wattage	25W±1W
Power Factor	≥0.9
Lumen Output ±5%	2180-2630lm
Beam Angle	90°
CCT	3000K/4000K/5700K
Lifespan	50,000h
L70B50	60,000h
CRI	≥80
SDCM	<6
Dimensions	Ø225*34mm
Cutout	Ø200-210 mm
Finishing Colour	White RAL 9016
Material	ADC12 & PC diffuser
Operating Temp (°C)	-20°C~45°C
Storage Temp (°C)	-20°C~65°C
Driver	Philips, Tridonic
LED Type	SMD
Protection Rating	IP54
Warranty	5 Years

Features & Applications

Roma II Professional is an LED downlight with super slim design, adopting high lumen SMD LED and PC diffuser for a uniform light. The ADC12 Aluminum profile provides excellent thermal dissipation to extend the life of the LEDs.

- Super slim design.
- IP54 protection rating.
- 50,000 hour lifetime.
- Selectable colour temperature.
- 90° beam angle.
- External driver.

Options Available	
Light Controls	Dali *D /Casambi *CM
Emergency Kit	PXEMKIT