


Viper Photocell EM CCT Datasheet

25W 2940-3250Lm LED Wall Pack

PXVIPERPCEM

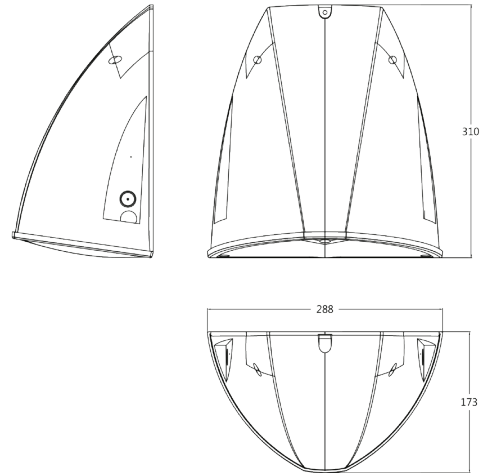

25W

IP65

LED

240V

Dimensions	288*173*310mm
Weight	1100g
Material	Polycarbonate
Colour/Finish	Black
IK Rating	IK10
Voltage/Frequency	220-240V 50/60Hz
Luminous Flux	2940 / 3250 / 3015Lm
Luminous Efficacy	118-130Lm/W
Color Rendering Index	80
CCT Colour Temp	3000K / 4000K / 6000K
SDCM Colour Consistency	<6
UGR Unified Glare Rating	-
LEDs	SMD 2835 (64pcs)
Light Control	Photocell Switches on <30Lux, off >70Lux
Beam Angle	100°
Adjustable	No
Chip	Epistar
Maintained Luminous Flux	50,000h (L80B10)
Emergency Mode:	3h @2W, LifePO4 Battery
Warranty	5 Years Fitting, 4 Years Battery

Features & Applications

- Photocell Emergency Model
- Highly Efficient up to 130Lm/W
- Colour Temperature Selectable
- 64ps SMD LED
- 50,000h Lifespan (L80B10)
- Tough IK10 Polycarbonate Body
- CRI ≥80
- 5 Year Warranty